


Green 545nm Laser Module

Wide Temperature Range

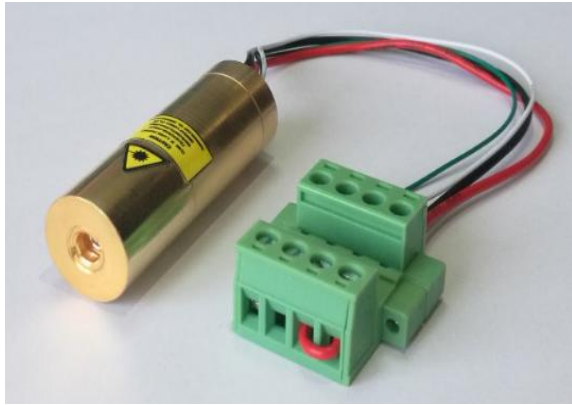


G545D100-18x55-15

Features

- DPSS Laser
- 100mW@545nm
- Wide Temperature Range
- Fast Rise Time
- High Reliability

Dimensions (Unit: mm)

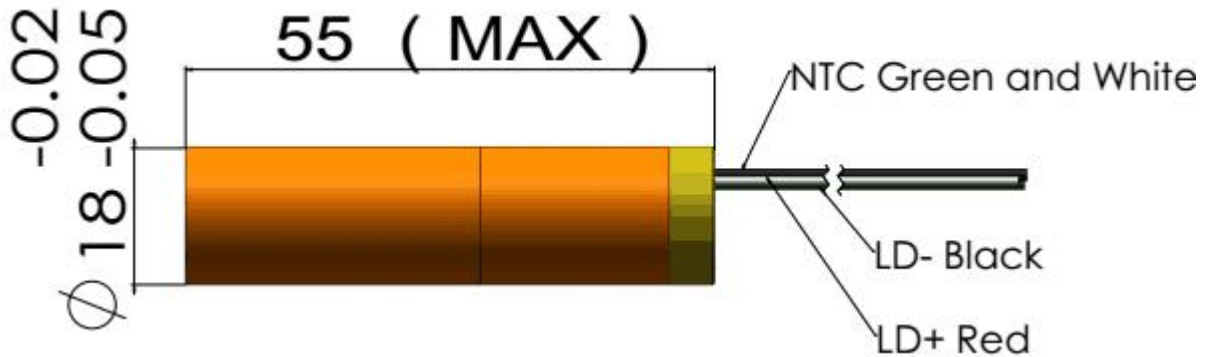

Specifications				
Model Number		G545D100-18x55-15		
Mechanical Specifications		<i>Min</i>	<i>Typ</i>	<i>Max</i>
Laser Head	Diameter (mm)	17.95	-	17.98
	Length (mm)	-	-	60
	Weight (g)	-	-	200
Housing Material		Brass		
Optical Specifications		<i>Min</i>	<i>Typ</i>	<i>Max</i>
Wavelength (nm)		544	545	546
Output Power (mW) at 25°C at 0.9A		95	100	-
Output Power (mW) at 0.9A at op. NTC Temp.		70	100	150
Power Stability at const. Temperature ⁽¹⁾		-	+/- 2%	+/- 5%
Output Power Mode		CW		
Laser Class		3B		

⁽¹⁾ after max. 3 minutes

Beam Specifications		Min	Typ	Max
Beam Divergence (mrad) ⁽¹⁾		-	10	15
Beam Alignment Tolerance	Position (Δr , mm)	-	-	0.5
	Off-axis Angle (mrad)	-	-	20
Beam Diameter at Output Window (mm)		-	0.5	-
Beam Roundness		-	NA ⁽⁴⁾	-
Beam Mode Longitude		Multi		
Beam Mode Transverse		See picture on page 3		
Polarization Ratio (Linear)		100:1	-	-
M ²		-	-	50
Residual IR		-	-	1%
Electrical Specifications		Min	Typ	Max
Power Type		ACC		
LD Voltage (DC, V)		1.8	2	2.3
LD Operating Current (mA) at 2V		-	900	1,500
Thermistor Constants		A = 2.231e ⁻³ B = 4.694e ⁻⁵ C = 0.884e ⁻⁶		
Thermistor Resistance		6.6K Ω @35 $^{\circ}$ C 8.2K Ω @30 $^{\circ}$ C 10.0K Ω @25 $^{\circ}$ C 12.3K Ω @20 $^{\circ}$ C 16.4K Ω @15 $^{\circ}$ C 18.5K Ω @10 $^{\circ}$ C		
Power Consumption (W) at 25 $^{\circ}$ C		-	0.6	1.0
Housing Isolation		No		
ESD protection		No		
Wire Length (mm) ⁽²⁾		200 (+/-50)		
Wire Type ⁽²⁾		20AWG / 28AWG		
Reliability		Min	Typ	Max
Operating NTC Temperature Range ($^{\circ}$ C)		24	-	30
Rise Time (seconds) at 5.5A ⁽³⁾ (-30 to 50 $^{\circ}$ C)		-	1	5
Storage Temperature ($^{\circ}$ C)		0	-	40
Environmental Humidity (RH, %)		5	-	85
Lifetime (hours) (MTTF at 25 $^{\circ}$ C)		5,000	-	-
RoHS Compliance Declaration		Yes		

⁽¹⁾ Full Angle (1/e²)

⁽²⁾ 20AWG for LD wires. 28AWG for NTC wires.

⁽³⁾ to 50% of full Output Power. Dot (~10mW) can be seen after 0.2s if >0.5A

⁽⁴⁾ See picture 5 on page 3 for example of beam spot


Remarks

- Product ID for placing orders: G545D100-18x55-15
- Datasheet Version: 1
- No Photodiode
- Customer is responsible for suitable heat sinking
- Label on plastic bag (see picture of another product's label in picture 2):
 - LASENCE®
 - G545D100-18x55-15
 - Lasence Order Number - Module Number
 - Label Length: 30mm (+/-3mm); Width: 25mm (+/-3mm)
- Anti-static protector for transportation (see picture 4)
- Example of beam spot (see picture 5)
- Laser Beam Warning Label on module housing (see picture 1)
- Laser Marking on module housing (see picture 3):
 - Lasence Material Code
 - Lasence Order Number - Module Number

Picture 1




Picture 2

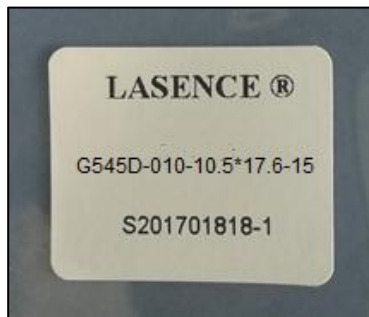

Picture 3



Picture 4

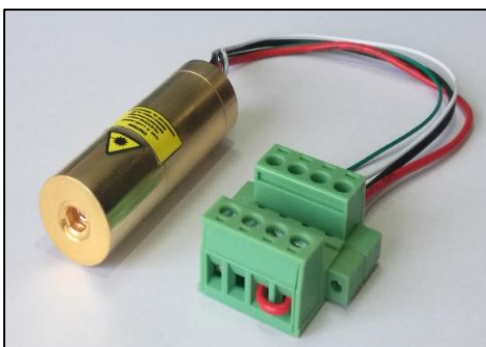

Picture 5

